
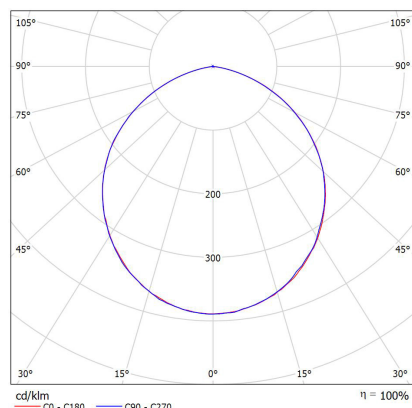


**Classification**  
Class II   
220 to 240VAC  
50Hz | PF:>0.9

**CCT**  
4000K, 6500K  
CRI: >80 Ra

**Applications**  
General Lighting  
Office  
Healthcare  
Retail  
Education

### Light Distribution



Beam Angle: 90°

### Construction:

Body: Plastic  
Diffuser: Opal Polycarbonate  
Ambient temperature: 0°C to +45°C  
Installation: Recessed ceiling  
IP40

### Dimensions

H

D

# Downlight DL 22

### Features:

- Driver built-in, integrated design
- Up to 60% energy saving
- No UV/IR light
- Eco-friendly, without mercury and any other hazardous substances
- Compliant to Photobiological Safety requirements
- Rated lifetime: 30,000 hours

### Optional:



Dimming



Emergency

### Product Variants

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (DxH)	Cutout: (mm)
DLS08-01X-2204	08W	750	95	Ø140x58	Ø127
DLS12-01X-2304	12W	1200	100	Ø140x58	Ø127
DLS16-01X-2406	16W	1600	100	Ø190x59	Ø165
DLS20-01X-2506	20W	2100	105	Ø190x59	Ø165
DLS24-01X-2606	24W	2500	105	Ø190x59	Ø165
DLS28-01X-2608	28W	3200	115	Ø230x72	Ø195
DLS34-01X-2708	34W	3900	115	Ø230x72	Ø195

### Frater Euro-Electricals. S.A.

Passeig de Gràcia, Barcelona, Spain.  
Contact: luminasales@awrostamani.com  
Tel:+971-4-5262333

**FRATER®**