

### Classification:

Class II   
220 to 240VAC  
50Hz | PF:>0.9


### CCT:

3000K, 4000K, 6500K  
CRI: 80 Ra

### Applications:

General Lighting  
Shops  
Office  
Retail  
Education

### Light Distribution:

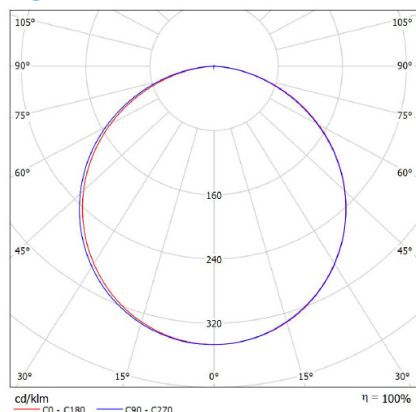


Beam Angle: 110°

### Construction:

Body: Die-cast aluminum  
Diffuser: Opal diffuser  
Ambient temperature: 0°C to +45°C  
Installation: Recessed  
IP40

### Dimensions:

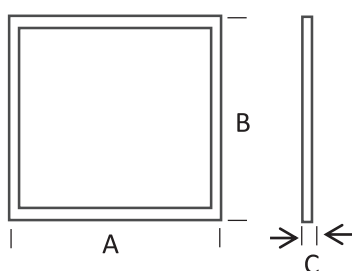

# Panel Light PL 60A

### Features:

- \* Edge-light, smooth and uniform light distribution
- \* No IR or UV radiation
- \* Compliance to photobiological safety requirements
- \* Eco-friendly, without mercury and any other hazardous substances
- \* Optional surface installation kit
- \* Rated lifetime: 20,000 hours



### Product Variants

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (AxBxC)
APL4060	40W	3200	80	595x595x8

**Frater Euro-Electricals. S.A.**  
Passeig de Gràcia, Barcelona, Spain.  
Contact: [luminasales@awrostamani.com](mailto:luminasales@awrostamani.com)  
Tel:+971-4-5262333

