


**Classification**  
Class II   
220 to 240VAC  
50Hz | PF:>0.9

**CCT**  
4000K, 6500K  
CRI: >80 Ra

**Applications**  
Parking  
Warehouses  
Workshops  
Factories  
Food industries

**Light Distribution**

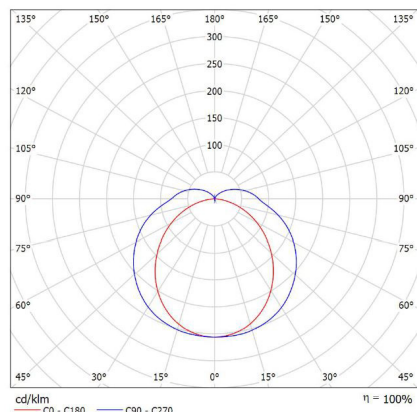


Beam Angle: 120°

**Construction:**

Body: Polycarbonate  
Diffuser: Polycarbonate.  
Clips: Plastic / SS  
Ambient temperature: -10°C to 50°C  
Installation: Surface / Suspended  
IP65

**Dimensions**

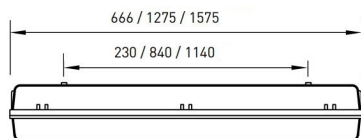

# Weatherproof WP11

**Features:**

- Transparent diffuser in injected polycarbonate (PC) with UV protection
- Suitable for 2' & 4' & 5' LED tubes
- Resistant to corrosion
- Easy to Install and Maintain

**Product Variants**

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (LxWxH)
FRP16-218	2x08W	1500	85	666x170x108
FRP36-236	2x18W	3000	85	1275x170x108
FRP54-258	2x26.5W	4550	85	1575x170x108

**Frater Euro-Electricals. S.A.**  
Passeig de Gràcia, Barcelona, Spain.  
Contact: [luminasales@awrostamani.com](mailto:luminasales@awrostamani.com)  
Tel:+971-4-5262333

