


TINNED COPPER TAPE

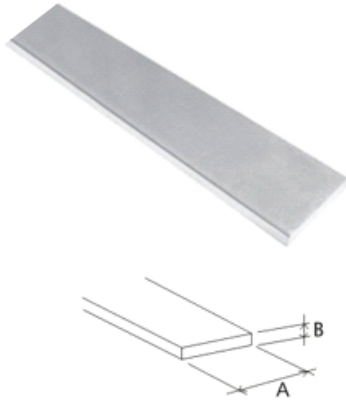

MATERIAL : OXYGEN FREE COPPER

AS PER BS EN:13601 (FORMERLY BS: 1432 C101 / C103)

FINISH : ELECTRO TINNED PLATED

PRODUCT REF.	CONDUCTOR SIZE (AXB) MM
HGTCT253	25 X 3
HGTCT256	25 X 6
HGTCT503	50 X 3
HGTCT506	50 X 6

BARE COPPER STRANDED CONDUCTORS

MATERIAL : SOFT DRAWN COPPER AS PER BS 6360



PRODUCT REF.	CONDUCTOR SIZE MM2	NO. OF STRANDING / WIRE DIA. MM
HGBCSC6	7/1.04	6
HGBCSC10	7/1.4	10
HGBCSC16	7/1.7	16
HGBCSC25	7/2.14	25
HGBCSC35	7/2.52	35
HGBCSC50	19/1.78	50
HGBCSC70	19/2.14	70
HGBCSC95	19/2.52	95
HGBCSC120	37/2.03	120
HGBCSC150	37/2.25	150
HGBCSC185	37/2.52	185
HGBCSC240	61/2.52	240

PVC INSULATED COPPER CONDUCTORS

MATERIAL : SOFT DRAWN COPPER AS PER BS 6360



PRODUCT REF.	CONDUCTOR SIZE MM2	NO. OF STRANDING / WIRE DIA. MM
HGYGC16	7/1.7	16
HGYGC25	7/2.14	25
HGYGC35	7/2.52	35
HGYGC50	19/1.78	50
HGYGC70	19/2.14	70
HGYGC95	19/2.52	95
HGYGC120	37/2.03	120
HGYGC150	37/2.25	150
HGYGC185	37/2.52	185
HGYGC240	61/2.25	240
HGYGC300	61/2.52	300
HGYGC400	61/2.85	400