


### COPPER REDUCING LINKS

MATERIAL : ELECTROLYTIC HIGH CONDUCTIVITY-COPPER  
FINISH : ELECTRO TINNED PLATED

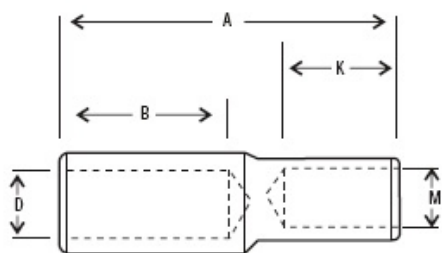

Product Ref.	Size mm <sup>2</sup>	Dimensions mm				
		A	B	D	K	M
HGRL 6-4	6	30	10	4	10	3.0
HGRL 10-6	10	30	10	4.5	10	4.0
HGRL 16-6	16	40	19	5.5	10	4.0
HGRL 16-10		40	19	5.5	10	4.5
HGRL 25-6	25	40	21	7.5	10	4.0
HGRL 25-10		40	21	7.5	10	4.5
HGRL 25-16		50	21	7.5	19	5.5
HGRL 35-10	35	40	21	8.5	10	4.5
HGRL 35-16		55	21	8.5	19	5.5
HGRL 35-25		60	21	8.5	21	7.5
HGRL 50-10	50	45	22	9.5	10	4.5
HGRL 50-16		55	22	9.5	19	5.5
HGRL 50-25		55	22	9.5	21	7.5
HGRL 50-35		60	22	9.5	21	8.5
HGRL 70-16	70	60	24	11.5	19	5,5
HGRL 70-25		60	24	11.5	21	7.5
HGRL 70-35		65	24	11.5	21	8.5
HGRL 70-50		65	24	11.5	22	9.5
HGRL 95-25	95	65	27	13.5	21	7.5
HGRL 95-25		65	27	13.5	21	8.5
HGRL 95-50		70	27	13.5	22	9.6
HGRL 95-70		70	27	13.5	24	11.5
HGRL 120-35	120	70	30	15.5	21	8.5
HGRL 120-50		70	30	15.5	22	9.5
HGRL 120-70		75	30	15.5	24	11.5
HGRL 120-95		75	30	15.5	27	13.5
HGRL 150-50	150	70	30	16.5	22	9.5
HGRL 150-70		75	30	16.5	.24	11.5
HGRL 150-95		80	30	16,5	27	13.5
HGRL 150-120		80	30	16.5	30	15.5
HGRL 185-70	185	75	32	18.5	24	11.5
HGRL 185-95		80	32	18.5	27	13.5
HGRL 185-120		85	32	18.5	30	15.5
HGRL 185-150		85	32	18.5	30	16.5
HGRL 240-95	240	85	38	21.5	27	13.5
HGRL 240-120		90	38	21.5	30	15.5
HGRL 240-150		90	38	21.5	30	16.5
HGRL 240-185		95	38	21.5	32	18.5
HGRL 300-120	300	95	42	23.5	30	15.5
HGRL 300-150		95	42	23.5	30	16.5
HGRL 300-185		100	42	23.5	32	18.5
HGRL 300-240		105	42	23.5	38	21.5
HGRL 400-150	400	110	55	26.5	30	16.5
HGRL 400-185		110	55	26.5	32	18.5
HGRL 400-240		125	55	26.5	38	21.5
HGRL 400-300		125	55	26.5	42	23.5
HGRL 500-185	500	115	55	30	32	18.5
HGRL 500-240		120	55	30	38	21.5
HGRL 500-300		125	55	30	42	23.5
HGRL 500-400		140	55	30	55	26.5
HGRL 630-240	630	120	56	34.5	38	21.5
HGRL 630-300	630	125	56	34.5	42	23.5
HGRL 630-400	630	140	56	34.5	55	26.5
HGRL 630-5	630	140	56	34.5	55	30

(All Dimensions in mm)