


ALUMINIUM - COPPER LUGS : BI-METALIC (WITH COPPER PALMS)


MATERIAL : ALUMINIUM - COPPER BI-METAL TERMINALS
(WITH COPPER PALMS)
FINISH : ELECTRO TINNED PLATED

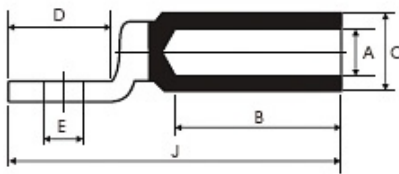

Product Ref.	Size mm ²	Dimensions mm					
		A	C	D	E	J	B
HGBT 16-10	16	5.5	16	20	10.3	81	43
HGBT 25-10	25	6.5	16	20	10.3	87	43
HGBT 35-10	35	8	16	20	10.3	89	43
HGBT 50-12	50	9	20	25	12.8	90	43
HGBT 70-12	70	11	20	25	12.8	90	43
HGBT 95-12	95	12.5	20	25	12.8	90	43
HGBT 120-12	120	13.7	25	30	12.8	108	59
HGBT 150-12	150	15.5	25	30	12.8	108	59
HGBT 185-14	185	17	32	35	14.5	119	59
HGBT 240-14	240	19.5	32	35	14.5	119	59
HGBT 300-16	300	23.3	40	36	16.5	125	85
HGBT 400-16	400	26	40	36	16.5	150	85
HGBT 500-16	500*	29.1	47	60X60	409	200	95
HGBT 630-4X9	630*	33.5	47	60X60	409	200	95
HGBT 800-4X9	800*	37.5	53	80X80	409	232	100
HGBT 1000-4X9	1000*	42	60	80X80	409	259	126
HGBT 1300-4X11	1300*	46.5	65	80X80	4011	267	136

ALUMINIUM - COPPER CONNECTOR BI-METALIC

MATERIAL : ELECTROLYTIC HIGH CONDUCTIVITY-COPPER
FINISH : ELECTRO TINNED PLATED/COPPER

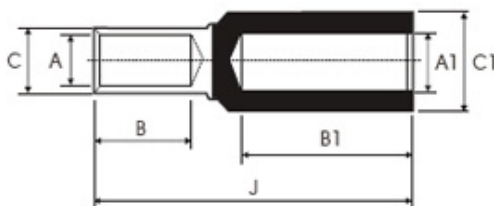

Product Ref.	Size mm ²		Dimensions mm						
	Al. Solid or Stranded	Copper Stranded	A	D	B	A1	C1	B1	J
HGBS 16-16	16	16	5.6	12.2	29	5.5	16	43	88
HGBS 25-16	25	16	5.6	12.2	29	6.5	16	43	88
HGBS 25-25	25	25	7	12.2	29	6.5	16	43	88
HGBS 35-16	35	16	5.6	12.2	29	8	16	43	88
HGBS 35-25	35	25	7	12.2	29	8	16	43	88
HGBS 35-35	35	35	8	12.2	29	8	16	43	88
HGBS 50-25	50	25	7	12.2	29	9	20	43	88
HGBS 50-35	50	35	8	12.2	29	9	20	43	88
HGBS 50-50	50	50	9.5	12.2	29	9	20	43	88
HGBS 70-35	70	35	8	12.2	29	11	20	43	88
HGBS 70-50	70	50	9.5	12.2	29	11	20	43	88
HGBS 70-70	70	70	11	12.2	33	11	20	43	90
HGBS 95-50	95	50	9.5	21	29	12.5	20	43	88
HGBS 95-70	95	70	11	12.2	33	12.5	20	43	90
HGBS 95-95	95	95	13	21	33	12.5	20	43	90
HGBS 120-70	120	70	11	21	33	13.7	25	59	107
HGBS 120-95	120	95	13	21	33	13.7	25	59	107
HGBS 120-120	120	120	14.2	21	33	13.7	25	59	107
HGBS 150-95	150	95	13	21	33	15.5	25	59	107
HGBS 150-120	150	120	14.2	21	33	15.5	25	59	107
HGBS 150-150	150	150	16	21	33	15.5	25	59	107
HGBS 185-120	185	120	14.2	21	33	17	32	59	107
HGBS 185-150	185	150	16	21	33	17	32	59	107
HGBS 185-185	185	185	18	26.2	43	17	32	59	120
HGBS 240-150	240	150	16	21	33	19.5	32	59	107
HGBS 240-185	240	185	18	26.2	43	19.5	32	59	120
HGBS 240-240	240	240	20	26.2	43	19.5	32	59	120

Cu-Al-Bi-Metal splices are used for joining aluminium cable to copper cable

(All Dimensions in mm)