


Fork Terminal

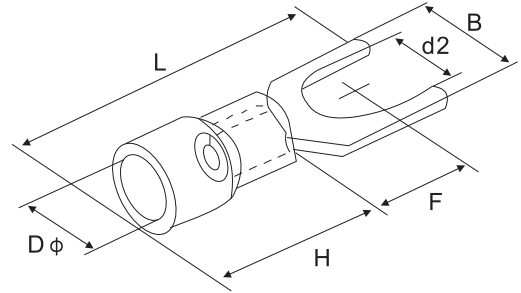

Model Number	American Screw Type	Dimension (mm)						Description
		d2(mm)	B	L	F	H	Dφ	
VY 1 - 3	#4	3.2	5.7	21.2	6.5	10.0	4.3	Material : Copper Applicable Wire Range 0.5 ~ 1.5mm ² AWG 22 ~ 16 Maximum current: I _{max} = 19A
VY 1 - 3.5S	#6	3.7	5.7	21.2	6.5			
VY 1 - 3.5L	#6	3.7	6.4	21.2	6.5			
VY 1 - 4S	#8	4.3	6.4	21.2	6.5			
VY 1 - 4M	#8	4.3	7.2	21.2	6.5			
VY 1 - 4L	#8	4.3	8.1	21.2	6.5			
VY 1 - 5S	#10	5.3	8.1	21.2	6.5			
VY 1 - 5L	#10	5.3	9.5	21.2	6.5			
VY 1 - 6S	1 / 4	6.5	9.5	21.2	6.5			
VY 1 - 6L	1 / 4	6.5	12.0	27.2	11.0			
VY 1 - 8	5 / 6	8.5	14.0	29.0	12.5			
VY 2 - 3	#4	3.2	5.7	21.2	6.5	10.0	4.9	Material : Copper Applicable Wire Range 1.5 ~ 2.5mm ² AWG 16 ~ 14 Maximum current: I _{max} = 27A
VY 2 - 3.5S	#6	3.7	5.7	21.2	6.5			
VY 2 - 3.5L	#6	3.7	6.4	21.2	6.5			
VY 2 - 4S	#8	4.3	6.4	21.2	6.5			
VY 2 - 4M	#8	4.3	7.2	21.2	6.5			
VY 2 - 4L	#8	4.3	8.1	21.2	6.5			
VY 2 - 5S	#10	5.3	8.1	21.2	6.5			
VY 2 - 5L	#10	5.3	9.5	21.2	6.5			
VY 2 - 6SS	1 / 4	6.5	9.5	21.2	6.5			
VY 2 - 6S	1 / 4	6.5	12.0	27.2	11.0			
VY 2 - 8	5 / 16	8.5	14.0	29.0	12.5			
VY 4 - 3.5	#4	3.7	5.7	24.8	7.0	12.5	6.2	Material : Copper Applicable Wire Range 2.5 ~ 4mm ² AWG 14 ~ 12 Maximum current: I _{max} = 37A
VY 4 - 4	#8	4.3	8.0	24.8	7.0			
VY 4 - 5S	#10	5.3	8.0	24.8	7.0			
VY 4 - 6	1 / 4	6.5	12.0	28.0	12.1			
VY 4 - 6S	1 / 4	6.5	9.0	25.2	7.5	12.5	6.7	Material : Copper Applicable Wire Range 4 ~ 6mm ² AWG 12 ~ 10 Maximum current: I _{max} = 48A
VY 5 - 3.5	#6	3.7	8.3	25.2	7.5			
VY 5 - 4S	#8	4.3	8.3	25.2	7.5			
VY 5 - 4L	#8	4.3	9.0	25.2	7.5			
VY 5 - 5	#10	5.3	9.0	25.2	7.5			
VY 5 - 6S	1 / 4	6.5	9.0	25.2	7.5			
VY 5 - 6L	1 / 4	6.5	12.0	31.2	12.0			
VY 5 - 8	5 / 16	8.5	14.0	30.0	11.5			