



Cable Tie


- Operating temperature:-40°C to 85°C (-40°F to 185°F)
- Heat material could reach to 120°C
- Specification: UL approved, UV Heat Resistant,
Color are available
- Material: UL approved, nylon 66 94V-2 *
- Color: All color available
- Package: 100pcs/bag
- Unit mm (inch)

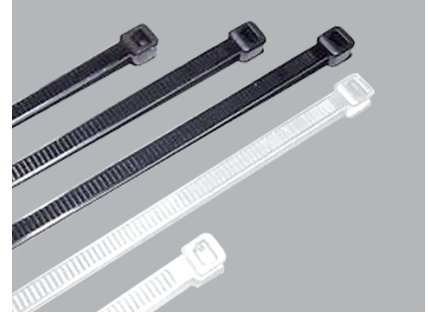

Part No.	Approx.Length mm(inch)	Approx.Width mm(inch)	Max.Bundle Dia. mm(inch)	Min,Loop Tensile Strength kg(lbs)
V-80SC	80(3.15)	2.4(0.09)	15(0.59)	8.0(17.68)
V-90SC	90(3.54)		16(0.63)	
V-100SC	100(3.94)	2.5(0.10)	22(0.87)	8.1(18)
V-120SC	120(4.72)		30(1.18)	
V-140SC	140(5.51)		33(1.30)	
V-150SC	150(5.91)		35(1.38)	
V-160SC	160(6.30)		38(1.50)	
V-200SC	200(7.87)		53(2.09)	

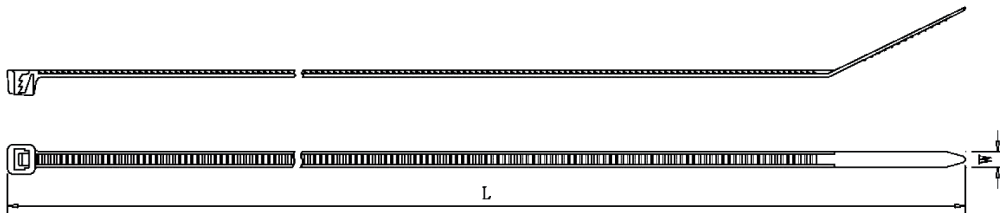

Part No.	Approx.Length mm(inch)	Approx.Width mm(inch)	Max.Bundle Dia. mm(inch)	Min,Loop Tensile Strength kg(lbs)
V-250MC	250(9.84)	2.8(0.11)	65(2.56)	14.0(31.00)
V-300MC	300(11.81)		76(2.99)	

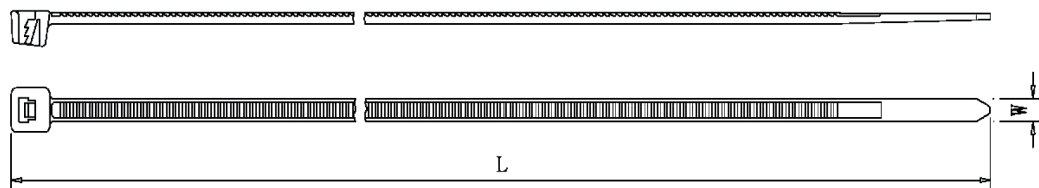

* Raw Materials Imported from USA.