


## Fuse Holder

### RT18

Type	Assorted Fuse	Rated Voltage(V)	Rated Current (A)	Dimension (mm)				
				A	B	C	D	E
RT18-32 1P	10 x 38	380	32	82	78	35	63	18
RT18-32 2P			32	82	78	35	63	36
RT18-32 3P			32	82	78	35	63	54
RT18-63 1P	14 x 51		63	106	103	35	80	26
RT18-63 2P			63	106	103	35	80	52
RT18-63 3P			63	106	103	35	80	78
RT18-32X 1P	10 x 38		32	82	78	35	63	18
RT18-32X 2P			32	82	78	35	63	36
RT18-32X 3P			32	82	78	35	63	54
RT18-63X 1P	14 x 51	63	106	103	35	80	26	
RT18-63X 2P		63	106	103	35	80	52	
RT18-63X 3P		63	106	103	35	80	78	




RT18-32/1P

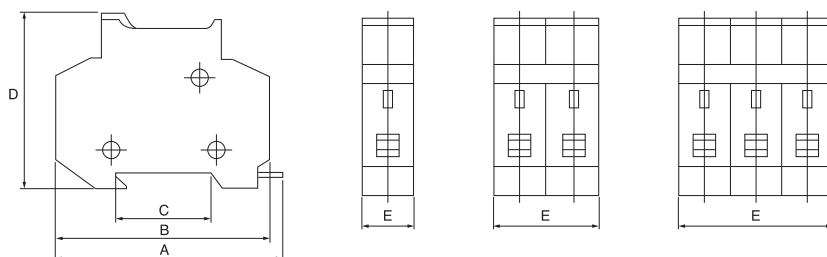

RT18-63X/3P

### Fuse Holder

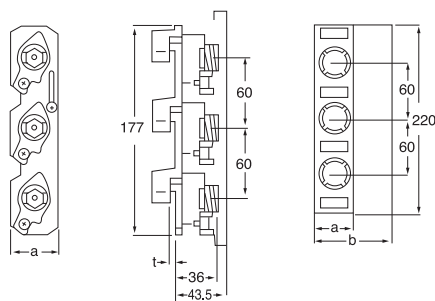

Busbar thickness:  
 t=5mm or 10mm  
 a=42mm with E27 3P/25A  
 57mm with E33 3P/63A

Size	a(1x)	b(2x)
E27 3P	42	84
E33 3P	57	114

### E27 3P/E33 3P Vertical type



E33 3P