

WIRING DEVICES & ACCESSORIES

45A SWITCHES & OUTLETS



SN 329



SN 327



SN 331



SN 821

MODEL NO.	MODEL	AMPERE RATING (A)	POWER (W)	STANDARD	MEASUREMENT / UNIT	CTN PACKING
SN 327	45A DP SWITCH WITH NEON(3 X 3)	45 A	11250 W	BS EN 60669 - 1	86 X 86 MM	100 / CARTON
SN 329	45A DP SWITCH WITH NEON(3 X 6)	45 A	11250 W	BS EN 60669 - 1	86 X 146 MM	50 / CARTON
SN 331	45A DP SWITCH WITH 13A SWITCHED SOCKET - WITH NEON	45A + 13A	11250 W	BS EN 60669 - 1	86 X 146 MM	50 / CARTON
SN 821	45A FLEX OUTLET / CONNECTION PLATE	45 A	11250 W	BS EN 60669 - 1	86 X 86 MM	100 / CARTON


	L,N,E
APPLICABLE WIRE RANGE`	4.0mm ² - 16.0mm ²

	L,N	E
INSULATION STRIPPING GAUGE	16 mm	10 mm

	L,N	E
APPROPRIATE TIGHTENING TORQUE	2.0Nm - 2.5Nm	1.6Nm - 2.0 Nm

VOLTAGE RATING	250 V~
MATERIAL	UREA
CONDUCTING STRIP & CLIP	BRASS & COPPER
CONTACTS	SILVER
MOUNTING DEPTH	21 mm

45A SWITCH

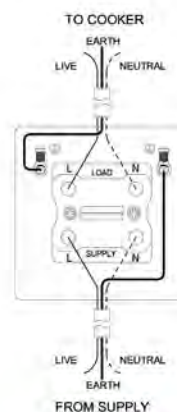

COOKER CONTROL UNIT

